## VETRO TWIN 5756

# astro

## SKU 1254018



## PRODUCT SPECIFICATION

#### **GENERAL**

FINISH: Matt Black
MAIN MATERIAL: Metal - Aluminium

**DIMENSIONS:** H: 175mm W: 90mm D: 80mm

H: 6.89" W: 3.54" D: 3.15"

INSTALLATION ORIENTATION: Ceiling Mount
CUT OUT HOLE: L: 6.30" W: 3.15"
RECESS DEPTH: 150mm/5.91"

FIRE RATING: Not Applicable CABLE LENGTH: 450mm/17.72"

GROSS WEIGHT: 1.47 (lbs)

CLASS: cETLus (Class 2)

LISTING LOCATION: Damp

FITTING METHOD: Recessed in Drywall Ceiling

ADA COMPLIANT: Yes

IC RATING: Non IC Rated

VOLTAGE: Constant Current 350 (mA)

## LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step MAXIMUM WATTAGE: 2 x 6W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 20.2 (Degrees) TILT ADJUSTMENT ANGLE: LAMP INCLUDED? Yes (Integral) Not Applicable **DELIVERED LUMENS:** 1231.6 (lm) ROTATION ADJUSTMENT ANGLE: Not Applicable COLOR TEMP: AVERAGE LIFESPAN: 3000 (K) 36,300 (Hrs) CRI: 80 L70: To Be Advised R9: 15.0

## ELECTRICAL


SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 109.95 (lm/w) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Not Applicable


## ADDITIONAL INFORMATION





BOX QUANTITY x 20

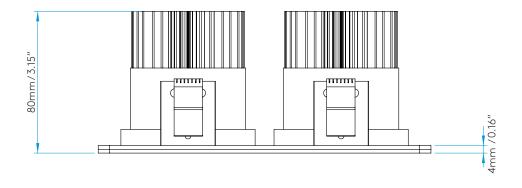

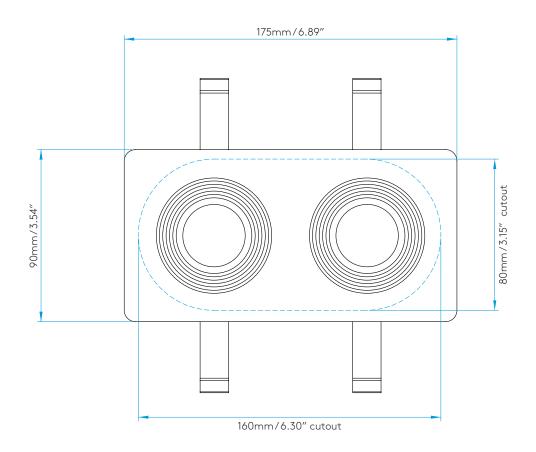

T: +1 800-240 7071 (toll free) T: +1 732-428 5551 E: infous@astrolighting.com us.astrolighting.com