
# VETRO SQUARE 5668

## SKU 1254002







## PRODUCT SPECIFICATION

#### **GENERAL**

FINISH: White

MAIN MATERIAL: Metal - Aluminium

**DIMENSIONS:** H:90mm W: 90mm D:75mm

H:3.54" W:3.54" D:2.95"

INSTALLATION ORIENTATION: Ceiling Mount

CUT OUT HOLE: 83mm/3-1/4" 150mm/5.9" **RECESS DEPTH:** 

FIRE RATING: Not Applicable CABLE LENGTH: Not Applicable

**GROSS WEIGHT:** 1.10 (lbs)

ETL (Class 2) CLASS: LISTING LOCATION: Damp

FITTING METHOD: Recessed in Drywall Ceiling

ADA COMPLIANT: Yes

IC RATING: Non IC Rated

**VOLTAGE:** Constant Current 350 (mA) Suitable for mounting PRODUCT F MARK: on flammable materials

## LAMP

LIGHT SOURCE: COB LED MAXIMUM WATTAGE: 1 x 10W

MAXIMUM LAMP LENGTH: Not Applicable LAMP INCLUDED? Yes (Integral) **DELIVERED LUMENS:** 614.3 (lm) COLOR TEMP: 3000 (K)

CRI: 80 R9: 14

MACADAM ELIPSE: 3 - Step UGR: To Be Advised

**BEAM ANGLE:** 20.4 (Degrees) TILT ADJUSTMENT ANGLE: Not Applicable **ROTATION ADJUSTMENT ANGLE:** Not Applicable AVERAGE LIFESPAN:

50,000 (Hrs) L70: To Be Advised

## **ELECTRICAL**

SWITCHED: SUPPLY FREQUENCY: No DIMMABLE: Yes DRIVER/BALLAST VOLTAGE:

DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN:

Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 49.74 (lm/w) DRIVER OUTPUT VOLTAGE: **DRIVER INCLUDED?** Not Applicable Not Applicable


## ADDITIONAL INFORMATION




**BOX QUANTITY X50** 

Not Applicable

Not Applicable

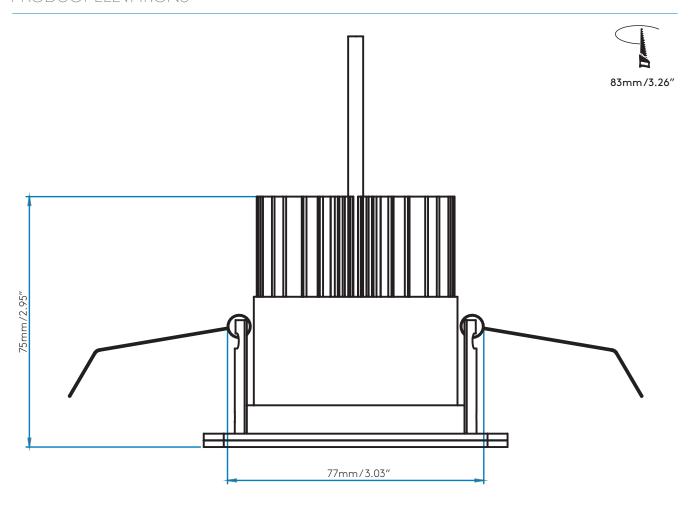

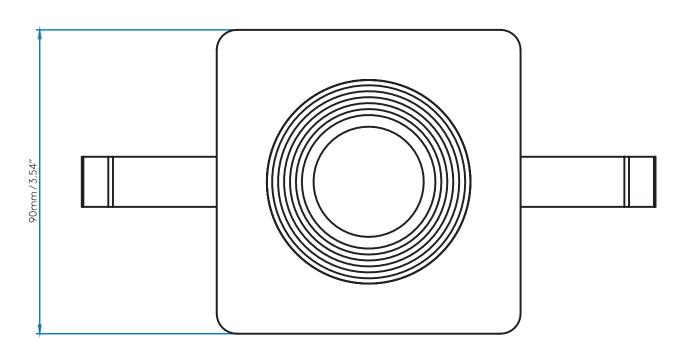

Astro Lighting Inc. 60 Broad Street Suite 3502 NY, NY 10004

T: +1 800-240 7071 (toll free)

T: +1 732-428 5551

E: ctedesco@astrolighting.com

www.astrolighting.com